



Doors DC

The DC series is a classic framed door with an installation depth, rebate design and glazing beads identical to 68 mm, 78 mm and 92 mm windows. We offer doors in two sash widths: 136mm as the standard solution and 106mm.

TYPES:

- single-sash framed doors
- double-sash framed doors
- doors + fanlight

* installation depth:
68 mm, 78 mm and 92 mm.



Thermal transmittance U_w

1,01 - 1,37 W/m²K



Security / Burglary resistance

Rc1 - Rc2 class



Sound insulation

(depending on the glazing unit used)
32 - 41 dB



Wind load resistance

C5 class

Doors DC

Basic information


HTR

Softline

Retro



Finishes:



HTR



Softline



Eco



Retro

Doors DC

Basic information

CONSTRUCTION

Wooden frame made of glued laminated timber along the length and thickness from solid sawn timber.

Frame and sash installation depth: 68 mm (78 and 92 mm are also available)

Sash profile - width 106 mm or 136 mm.

MATERIAL



pine

meranti

oak

FILLING

- flat insert panel
- flat insert panel with decorations
- double-glazed unit with 24 mm thickness

Filling thickness 24mm-36mm (for a frame depth of 68 mm)

OPTIONAL :

- triple-glazing unit with 36mm thickness
- safety glass: laminated VSG, tempered ESG
- soundproof

LAZURES



EQUIPMENT

STANDARD:

HANDLES – the standard equipment of wooden doors includes good quality aluminum handles: handle-handle or handle-knob.

HINGES – adjustable in 3 planes. Hinges covers are in the colour of the handles.

BOLTS / LOCKS / INSERTS – a lock in the form of a 3-point automatic bolt, equipped with a class A insert with a set of 3 keys.

OPTIONAL:

- Class C insert
- insert with internal knob
- two inserts with the same key
- anti-burglary bolts on the hinge side



PAINTING

The joinery is painted with water-based, eco-friendly, transparent or opaque varnishes.

OPAQUE COLOURS according to the RAL or NCS palette
LAZURES highlight the wood structure.



* As standard, the colour inside and outside is identical.



INSERT (lock):

Standard both-sided



with knob

HINGES



white brown black old gold chrom mat




Doors DC


Threshold types

Doors DC – thresholds


Alu threshold - 20 mm




Alu threshold - 20 mm
with masking cover




Alu threshold - 32 mm




Wooden threshold - 32 mm



Threshold-free system
(drop seal)





Threshold-free system
(brush seal)



OPTIONS



Frame / Sash / Glazing bead

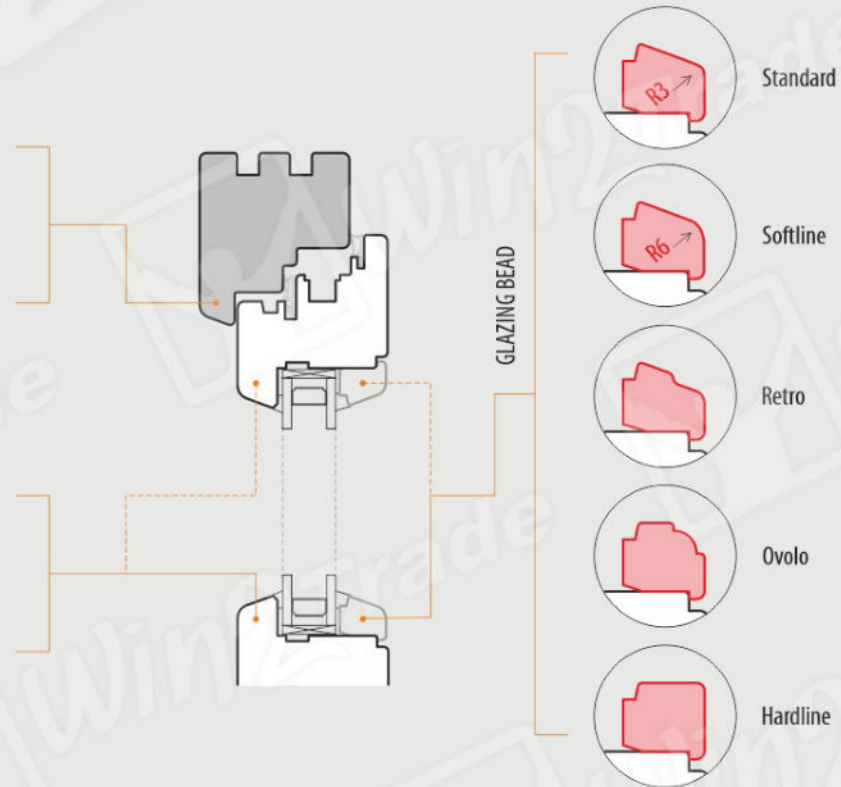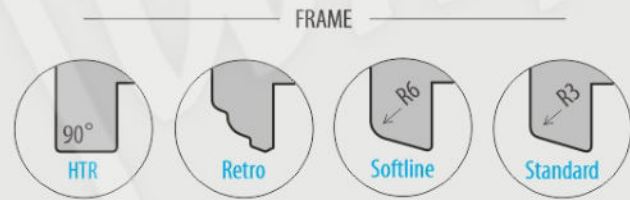





ENTRANCE DOORS

Doors DC 68

Basic cross-sections

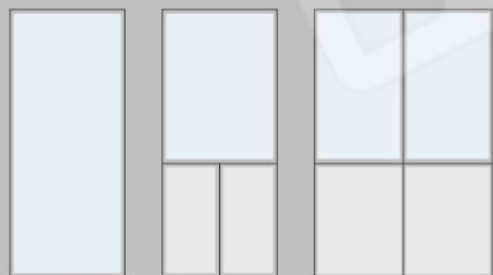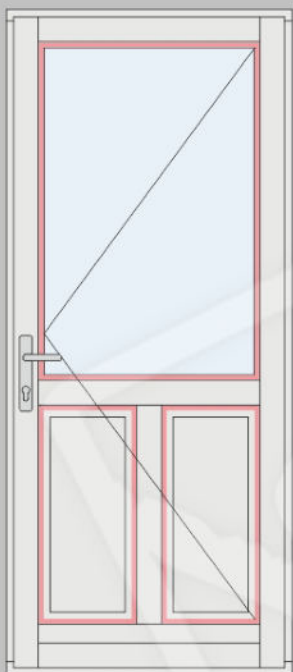

www.win2trade.eu

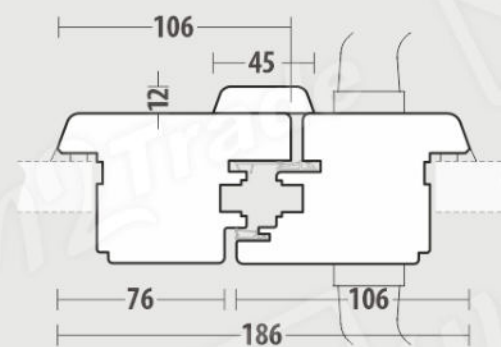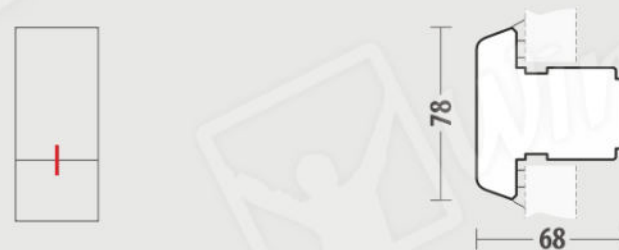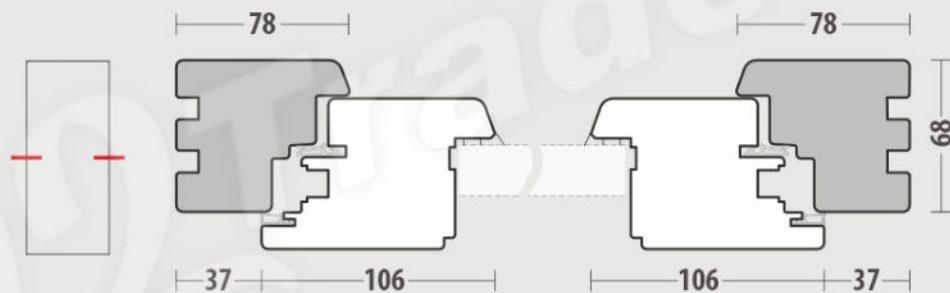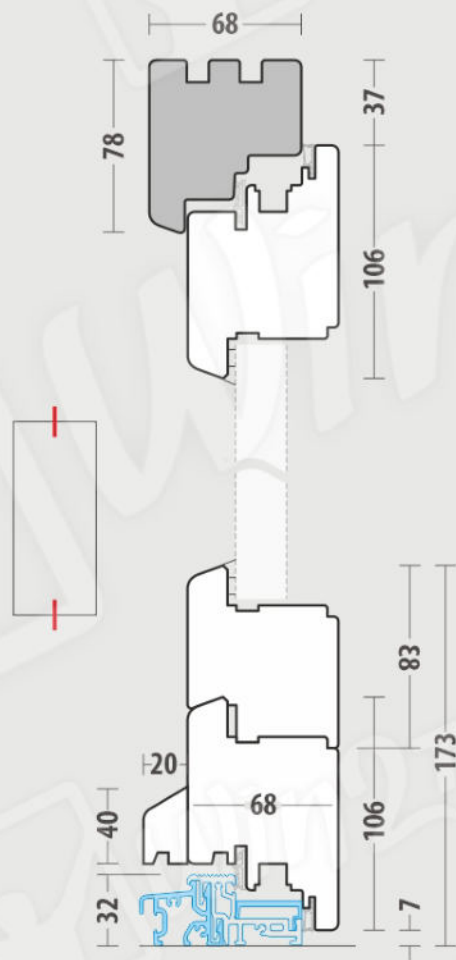

ENTRANCE DOORS

Doors DC - 68|78|92

Frame and sash installation depth





Softline

frame



Softline

Sash

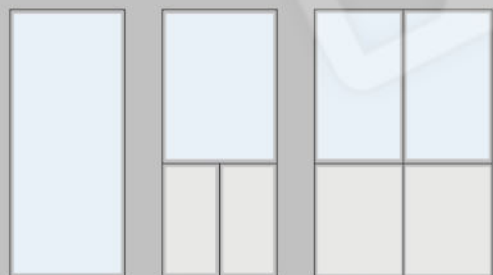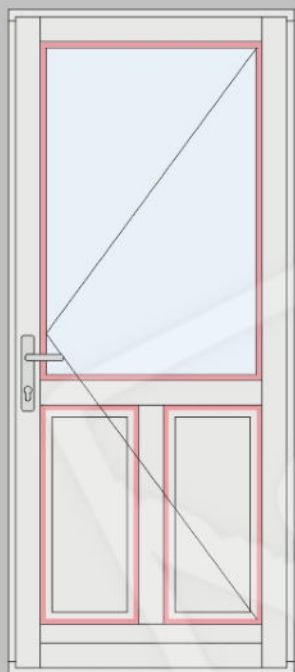


OPTIONS
INSTALLATION DEPTHS

68

78

92

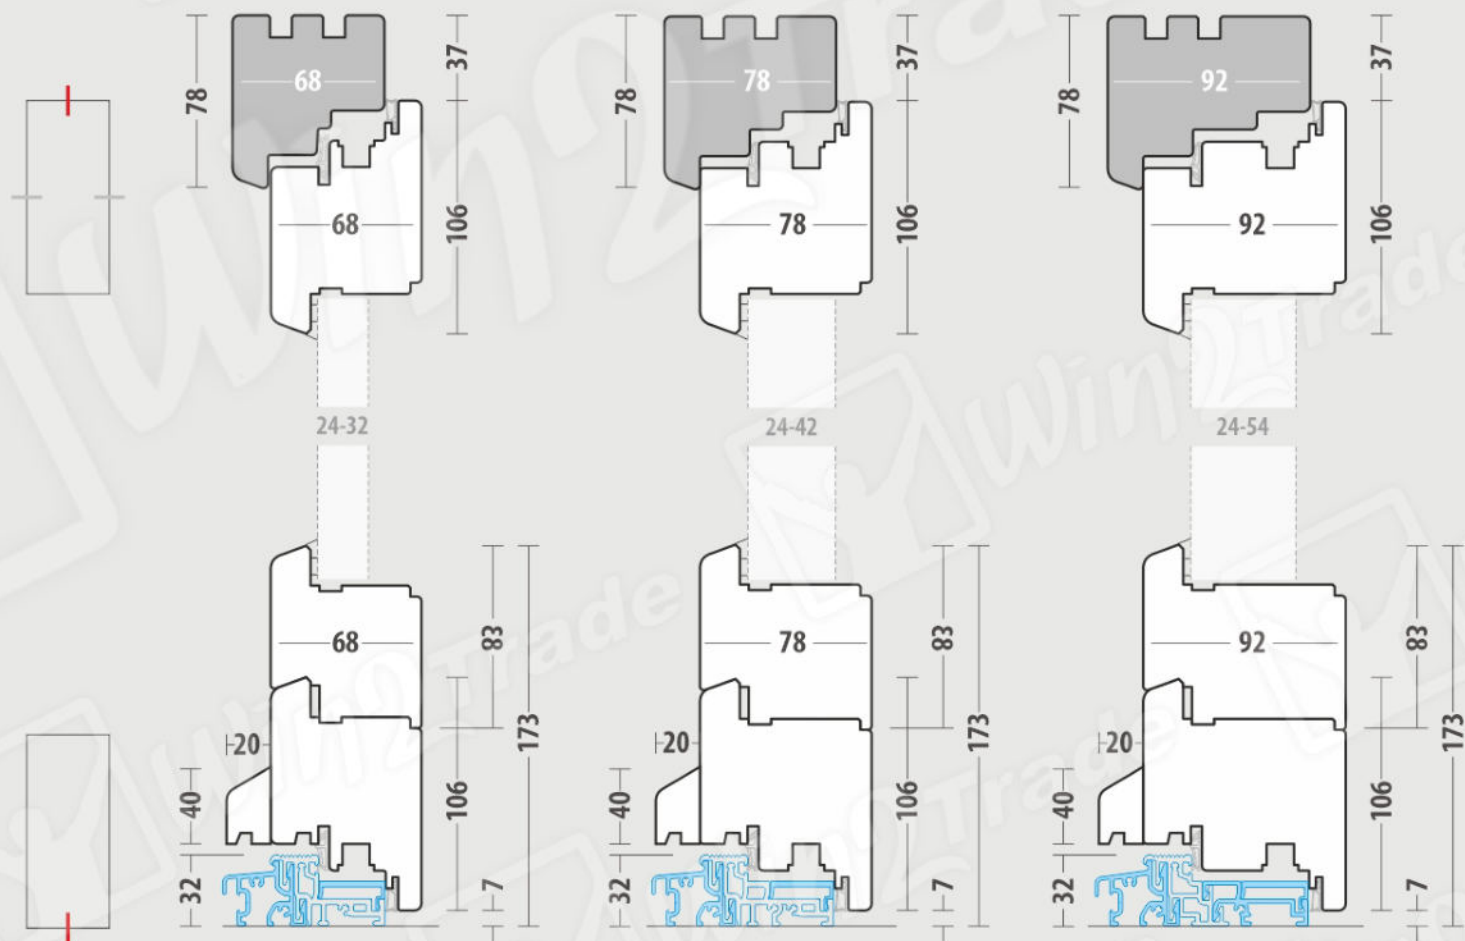

OPTIONS

Filling

(Standard, Softline, Retro, HTR)

Glazing packages



Insert panels

