



WINDOWS Traditional 68

Basic information

Traditional

Traditional windows always have a visible wooden drip cap mounted on the sash.

The window threshold, depending on the country (region), may have a different finishing – most often in the form of a wooden external window sill, permanently attached to the window.


* available installation depths:
68, 78 i 92 mm.



Finish type



Softline



Retro



Thermal transmittance U_w

1,01 - 1,37 W/m²K



Security / Burglary resistance

Rc1 - Rc2 class



Sound insulation

(depending on the glazing unit used)
32 - 41 dB



Wind load resistance

C5 class

WINDOWS

Traditional 68

Basic information

CONSTRUCTION

Wooden frame made of glued laminated timber along the length and thickness from solid sawn timber.

Frame and sash installation depth: 68mm (78 and 92 mm are also available)

MATERIAL



pine

meranti

oak

GLASS

Energy-saving double- or triple-glazed units (double-chamber) made of low-emissivity glass with an argon-filled inter-pane space.



OPTIONAL :

- safety glass: laminated VSG, tempered ESG
- soundproof
- solar control
- maximum glazing package thickness for 68 mm profile is 32mm

LAZURES



WYPOSAŻENIE

STANDARD:

The basic model of the handle for Eco windows is the Hoppe metal handle, model **Tokyo** in white or brown.

OPTIONAL:

- handles that increase safety, such as handles with button or handles with key
- handles with a lockable turned-opening
- CREMONA with adapter
- vents mounted horizontally in the sash
- muntins: inter-pane, glued on, vienna bars and construction bars

PAINTING

The joinery is painted with water-based, eco-friendly, transparent or opaque varnishes.

OPAQUE COLOURS according to the RAL or NCS palette
LAZURES highlight the wood structure.




* As standard, the colour inside and outside is identical.



WINDOWS

Traditional 68

Basic cross-sections (Softline)







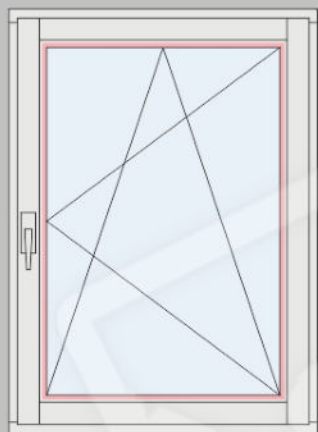


Traditional Softline



frame / sash


OPTIONS GLAZING BEAD

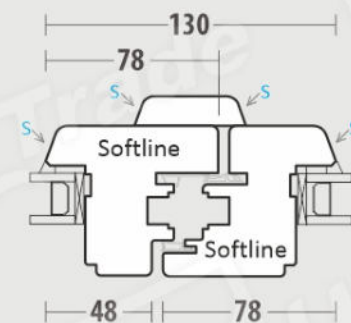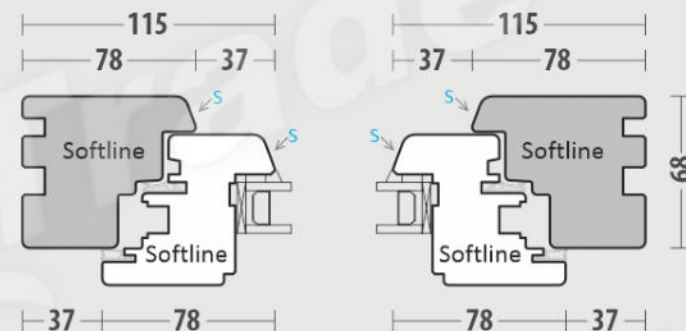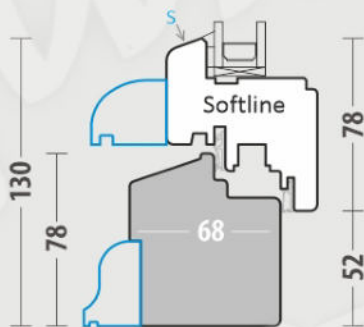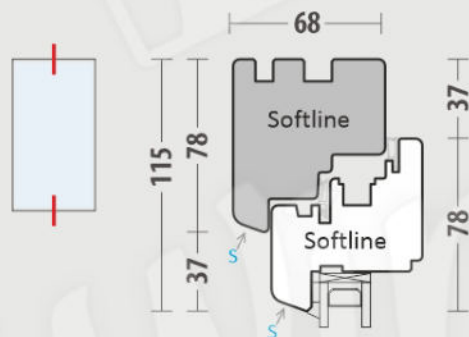

WINDOWS

Traditional 68

Basic cross-sections (Retro)

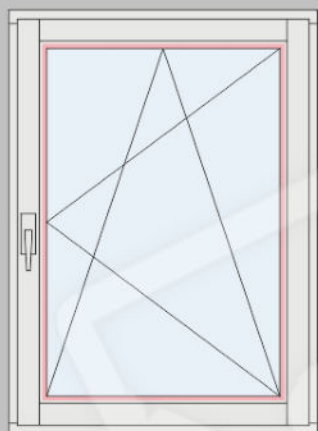


Traditional
Retro



frame / sash

OPTIONS
GLAZING BEAD

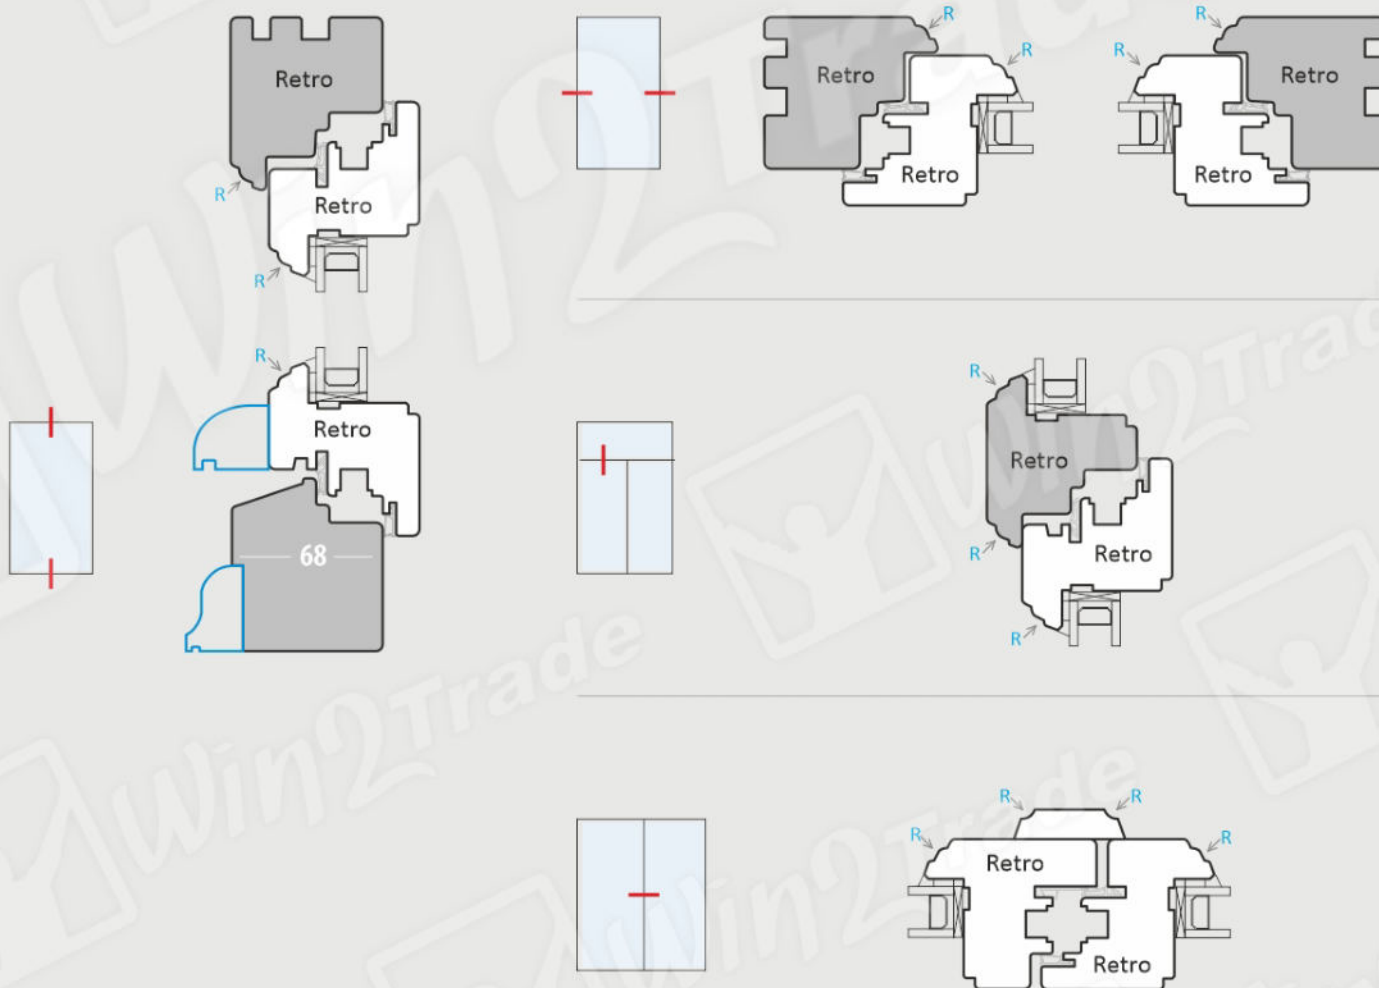

OPTIONS




Drip caps

A - sash, B - threshold







Traditional
**Softline
Retro**

A

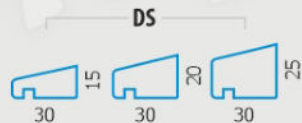

B





Sills



(external window sill)



R-6



R-25



WINDOWS

Traditional 68|78|92

Frame and sash installation depth



Traditional
Softline




frame / sash

Traditional
Retro




frame / sash


OPTIONS
INSTALLATION DEPTHS

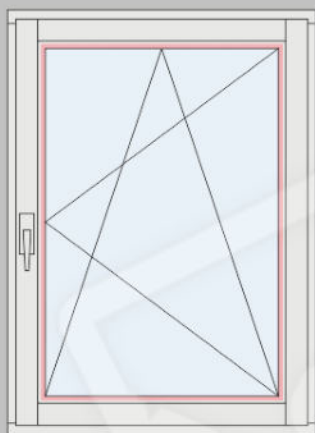

68

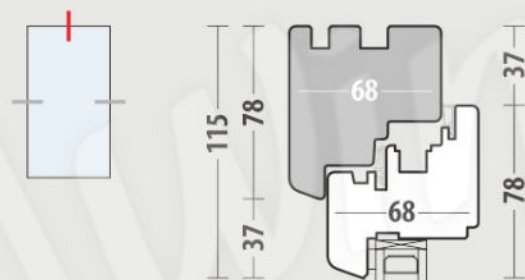

78



92

